





**ROMANSTONE®**  
INTERLOCKING PAVING STONES [romanstone.com](http://romanstone.com)

## Cobble Stone™



Terra Cotta Blend

Timberwood Blend

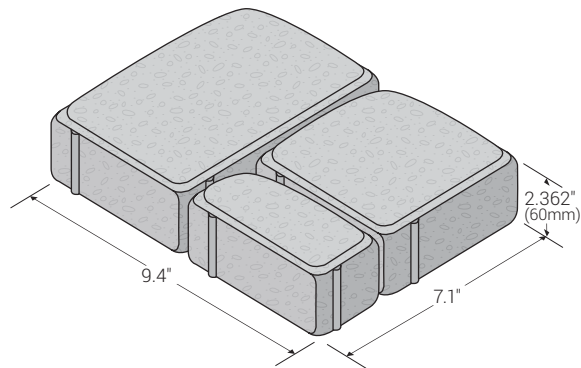

Size	UNITS/Sq. Ft.	Sq. Ft. PALLET *	UNITS/PALLET *	WEIGHT /PALLET *
7.1" x 4.7" x 2.36" (60 MM)	4.31	} 108.5	180	} 2,990 LBS
2.4" x 4.7" x 2.36" (60 MM)	12.76		120	
4.7" x 4.7" x 2.36" (60 MM)	6.51		390	

**\*SOLD IN FULL PALLETS ONLY**

This multi-sized paver incorporates rounded corners and chamfers, giving a unique, naturally aged and timeless look. The three different sizes allow for random laying patterns for a distinctive and antiqued look.




Create an "antiqued" setting, simply with Cobble Stone™. All three stones are packaged on one pallet for easy installation.

## Specifications


Cobble Stone™ is produced using a “no-slump” concrete mix, made under extreme pressure and high frequency vibrations. Unit pavers will meet or exceed the requirements established in the ASTM C936 (standard specification for interlocking concrete paving units). Requirements of this standard include an average compressive strength of 8,000 psi, average absorption no greater than 5%.

## Laying Patterns

Random

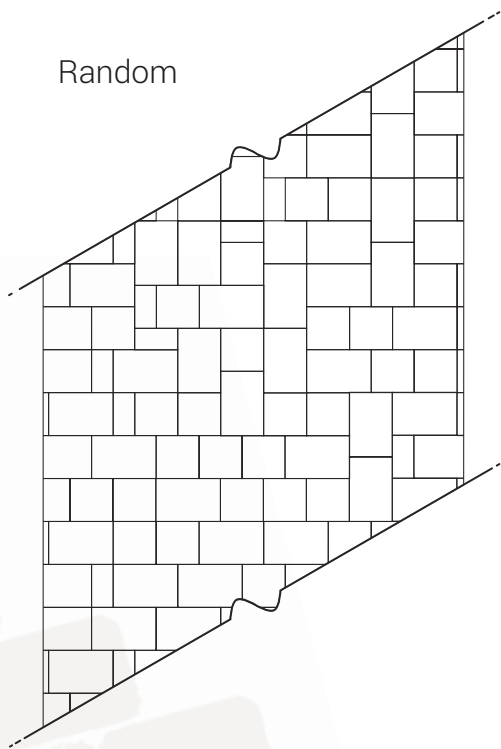

Random Rows

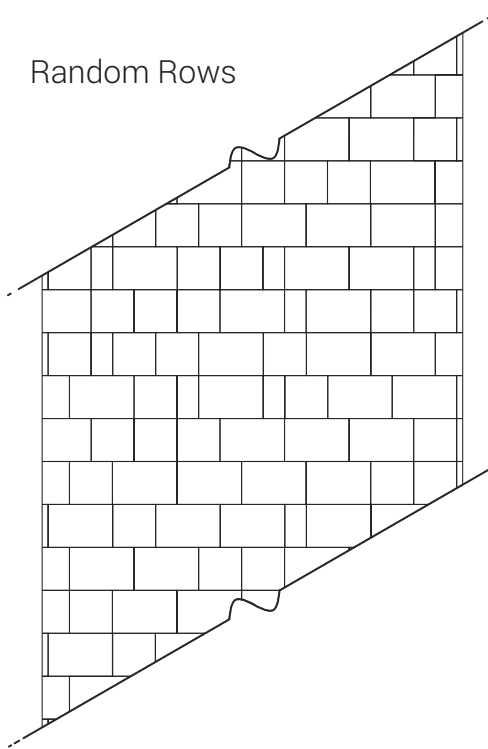

## Installation Tip

Cobble Stone™ is intended to be laid in a true random pattern. To insure unit interlock, be sure to break the bond at least every 18" to 24". Avoid relying on the small unit. Only 8% of the pattern will be the small paver.



Available at: